




AVIDHIFI

ACCENT INTEGRATED AMPLIFIER

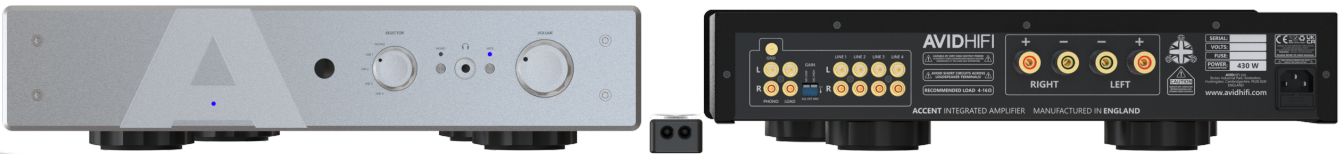

"Hear the drama
in every decibel"

Experience exceptional audio through the compact yet commanding ACCENT Integrated Amplifier. Equipped with a remote control, and four RCA line inputs, in addition to the dedicated phono input plumbed directly into our award-winning onboard Pellar phono stage, this amplifier offers a gateway to premium home audio.

Derived from our esteemed integrated amplifier lineage, the ACCENT stands as a testament to cutting-edge specifications. Featuring the acclaimed Pellar Phonostage, compatible with all cartridges, and fortified signal paths enhanced by custom polypropylene capacitors, the final output is seamlessly regulated by the exceptional ALPS volume control. A bespoke 617VA toroidal mains transformer and immense 40,000uF capacitor bank is perpetually poised to deliver instantly accessible punch for even the most demanding of loudspeakers. Or for those of you looking for a more personal experience our award-winning onboard headphone amplifier will have you fully immersed.

Encased in robust heavy gauge steel, the ACCENT prioritises protection for even the most delicate components. A true embodiment of meticulous craftsmanship, every detail – from the solid aluminium front panel with its unique control buttons to the elegantly patterned cover bearing our striking "A" logo – resonates with precision and excellence. Upon unboxing, the palpable quality of the ACCENT Integrated Amplifier is unmistakable, underscoring its unmatched value within its class. Elevate your auditory journey with the ACCENT and encounter music in its purest form.

INPUTS

PHONO	1 x RCA (Pair)
Gain	48dB – 60dB – 70dB
Resistance	47K – Custom (500Ω Loading Plug Supplied)
Capacitance	100pF
Distortion	< 0.001%
RIAA Accuracy	5Hz – 70kHz +/-0.5dB (Neumann HF correction)
Noise (A weighted)	MM –81dB / MC –67dB (high setting)
Channel separation	< -85dB 5Hz – 20KHz
LINE	4 x RCA (Line In)
Nominal sensitivity	340mV Volume Full 100W
Resistance	82kΩ (RCA)
Maximum input	11 Vrms
Frequency response	5Hz—over 80kHz ± 1dB
Signal/Noise Ratio	100 dB (Awt'd) 50 W, ref. 1V input

OUTPUTS

Output	70W 8Ω
Harmonic Distortion	0.003% (80% Power 8Ω 1KHz)
Loudspeaker Outputs	2 sets AVIDHIFI Gold plated custom binding posts (Pairs)
L/S Impedance	4-16Ω

POWER CONSUMPTION

Power supply	617Va Mains Transformer + 40,000 uF Capacitor Resevior
Voltage input	115V or 230V AC (region dependent)
Power Consumption	430 Watts (MAX) No Signal Idle 800 Watts clipping 4 Ohm Load
Mains input Socket	IEC C14 Type
Mains input Cable	IEC C13 Type

DIMENSIONS AND WEIGHTS

Dimensions	470 x 410 x 110mm (WxDxH)
Net weight	14.5kg (32lb)
Packaging (each)	550 x 470 x 190mm (WxDxH)
Shipping weight	17.5Kg (38.6lb)



Bicton Industrial Park, Kimbolton, Huntingdon, Cambs. PE28 0LW ENGLAND
Tel: +44 (0)1480 869900 / Web: www.avidhifi.co.uk / Email: info@avidhifi.co.uk